



# ATMOSPHERE SERIES TERRAZZO TILE




TZ41  
SWISS ALPS




TZ42  
BLUE HAWAII




TZ43  
ST TROPEZ




TZ44  
CANCUN




TZ45  
KEY WEST



TZ46  
MOROCCO




TZ47  
BARBADOS




TZ48  
RIVIERA




TZ53  
ANALYTICAL



TZ54  
AMBIENCE



TZ63  
BRILLIANCE



TZ65  
ESSENCE




TZ68  
RADIANCE

PROPERTY	ADVANCED TESTING VALUE	TEST METHOD
Compression Strength	> 8,000 PSI avg.	ASTM C140
Absorption	< 5% avg.	ASTM C140
Flexural Strength	> 1,000 PSI avg.	ASTM C293
C373 Water Absorption	Passes (Semi-Vitreous)	-
C482 Bond Strength	> 300 PSI	-
C485 Warpage Edge	+/- .001% or .002 in.	-
C485 Warpage Diagonal	+/- .003% or .010 in.	-
C499 Nominal Size	Range of .029 in.	-
C499 Thickness	Range of .029 in.	-
Dynamic DCOF	Passes at Factory	-
ANSI A173.1 Section 9.6.1	Wet Dynamic Coefficient of Friction (DCOF)	-
Avg. Polished Finish	0.46	-
Avg. Honed Finish	0.54	-

Testing based on 12" x 12" x 1/2" tile

## STANDARD SIZES

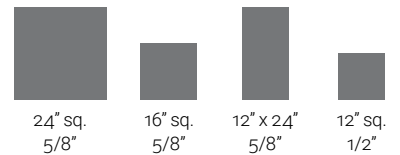

*Due to the natural variances in materials, the color characteristics of manufactured terrazzo tile may differ slightly from the color swatches pictured. Your monitor or printer may not be an accurate representation of the actual production color or finish.*

*Custom Colors Available.*

**CALL FOR FURTHER DETAILS & PRICING.**

P: 800.388.8728 | E: [wtile@wausautile.com](mailto:wtile@wausautile.com) | [WAUSAUTILE.COM](http://WAUSAUTILE.COM)