




SERIES SESTO™ TERRAZZO TILE




SST10
PISA




SST11
DALMATA




SST12
BIANCO




SST13
ZUCCA




SST14
SOLE




SST16
VENERE




SST17
NOTTE



SST18
ROMAN



SST19
CAFFE




SST20
RAVELLO

PROPERTY	ADVANCED TESTING VALUE	TEST METHOD
Compression Strength	> 8,000 PSI avg.	ASTM C140
Absorption	< 5% avg.	ASTM C140
Flexural Strength	Meets or exceeds standard	ASTM C140/C293
C482 Bond Strength	> 300 PSI	ASTM C482
C485 Warpage Edge	+/- .001% or .002 in.	ASTM C485
C485 Warpage Diagonal	+/- .003% or .010 in.	ASTM C485
Nominal Size	Range of .029 in.	ASTM C499
Thickness	Range of .029 in.	ASTM C499
DCOF	Passes at Factory	ANSI A326.3

Testing based on 12" x 12" x 1/2" tile

STANDARD SIZES

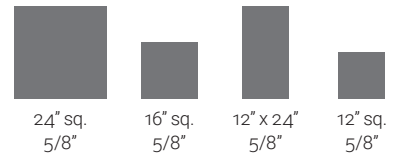

Due to the natural variances in materials, the color characteristics of manufactured terrazzo tile may differ slightly from the color swatches pictured. Your monitor or printer may not be an accurate representation of the actual production color or finish.

Custom Colors Available.

CALL FOR FURTHER DETAILS & PRICING.

P: 800.388.8728 | E: wtile@wausautile.com | WAUSAUTILE.COM